

# NEW

Product Information

## Wall-Mounted Air Conditioners & Heat Pumps

R410A

# SANYO

## SAP-KR74E/EH SAP-KR94E/EH SAP-KR124E/EH

### All you need in a compact design



Indoor Unit

SAP-KR74EH  
SAP-KR74E

SAP-KR94EH  
SAP-KR94E

SAP-KR124EH  
SAP-KR124E



New Wireless  
Remote Controller



SAP-CR74EH  
SAP-CR74E  
SAP-CLR74E\*

SAP-CR94EH  
SAP-CR94E  
SAP-CLR94E\*



SAP-CR124EH  
SAP-CR124E  
SAP-CLR124E\*  
(\*Low ambient model)

Outdoor Unit

#### Features



- Quiet mode 25dB
- Attractive modern appearance
- High power
- Air clean filter
- Sleek multi functional remote controller with built-in sensor
- Auto restart function
- Night set back
- 24hrs timer
- Auto change over (H/P)

# SAP-KR74E/EH, SAP-KR94E/EH, SAP-KR124E/EH

The unit with the new wireless remote control features the convenience of diverse functions.

## Wireless Remote Controller

Built-in Temperature sensor remote controller provides you with more comfort.

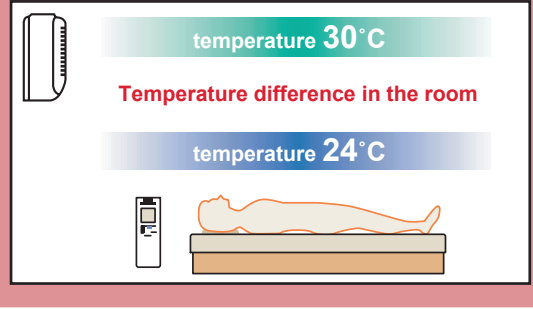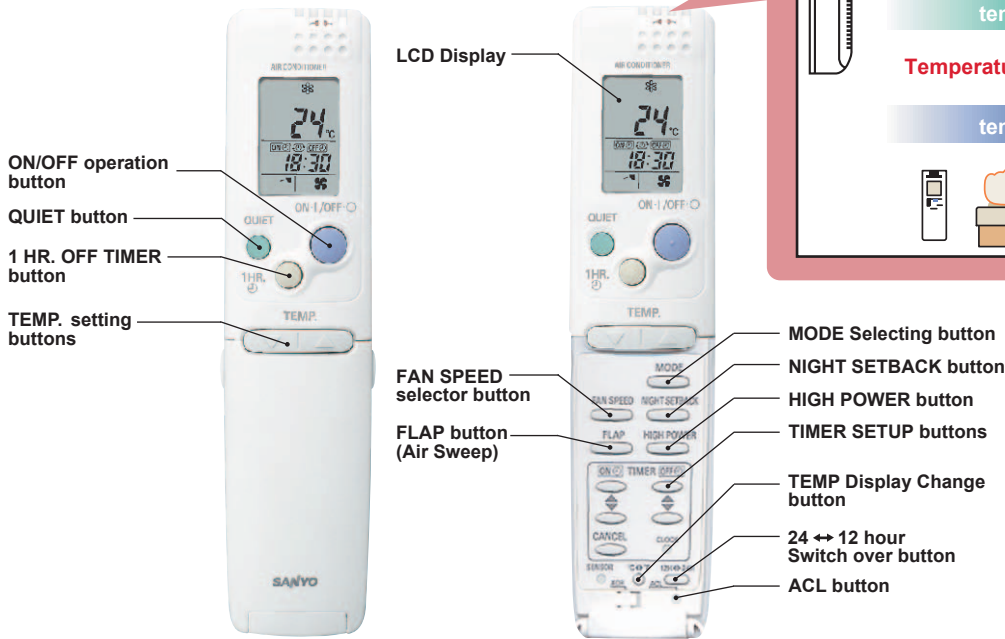

## SLIM & MODERN DESIGN



## Specifications

(\*Low ambient model)

MODEL NO.	Indoor Unit Outdoor Unit	SAP-KR74EH SAP-CR74EH		SAP-KR94EH SAP-CR94EH		SAP-KR124EH SAP-CR124EH		SAP-KR74E SAP-CLR74E*		SAP-KR94E SAP-CLR94E*		SAP-KR124E SAP-CLR124E*	
		Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling		Cooling		Cooling	
Capacity	kW	2.20	2.50	2.65	3.00	3.50	4.00	2.20		2.65		3.50	
Air-circulation	Hi m <sup>3</sup> /h	430	450	480	500	500	530	430		480		500	
Moisture removal	Hi Liters/h	1.3	-	1.8	-	2.0	-	1.3		1.8		2.0	
<b>Electrical Ratings</b>		1ø, 50Hz		1ø, 50Hz		1ø, 50Hz		1ø, 50Hz		1ø, 50Hz		1ø, 50Hz	
Voltage rating	V	220-240		220-240		220-240		220-240		220-240		220-240	
Available voltage range	V	198-264		198-264		198-264		198-264		198-264		198-264	
Running amperes	A	3.10	3.10	3.70	3.80	4.90	5.00	3.10		3.70		4.90	
Power input	W	685	690	825	830	1,090	1,105	685		825		1,090	
Power factor	%	96.1%	96.8%	96.9%	95.0%	96.7%	96.1%	96.1%		96.9%		96.7%	
C.O.P.	W/W	3.21	3.62	3.21	3.61	3.21	3.62	3.21		3.21		3.21	
Operating noise (Measurement conform to JIS28731)	IN (H/M/L) dB-A	36/32/28	35/31/27	38/33/28	37/32/27	41/34/28	40/33/27	36/32/28	36/32/28	38/33/28	38/33/28	41/34/28	41/34/28
	at Quiet mode IN dB-A	25	24	25	24	25	24	25	25	25	25	25	25
	OUT dB-A	46	47	47	48	49	50	46	46	47	47	49	49
<b>Features</b>		Microprocessor						Microprocessor					
Controls		Rotary (Hermetic)						Rotary (Hermetic)					
Compressor		3 Speed + Auto						3 Speed + Auto					
Fan speed		ON / OFF 24 hour & Daily program, 1-hour Off						ON / OFF 24 hour & Daily program, 1-hour Off					
Timer		Manual						Manual					
Air-deflection	Horizontal Vertical	Auto						Auto					
Air filter		Washable & AntiMold						Washable & AntiMold					
Air clean filter		Dust-collecting & Deodorizing						Dust-collecting & Deodorizing					
Panel		Removable & Washable						Removable & Washable					
Remote controller		With Holder / Address SW						With Holder / Address SW					
Max.tube length at shipment	m	7.5						7.5					
Ref.dia.Na/Wi. Pipe	mm(n)	6.35 (1/4) / 9.525 (3/8)						6.35 (1/4) / 9.525 (3/8)					
<b>Cabinet Dimensions</b>													
Indoor unit	Height mm	285						285					
	Width mm	825						825					
	Depth mm	189						189					
	Net weight kg	10.0						10.0					
Outdoor unit	Height mm	548				565				548		565	
	Width mm	720				790				720		790	
	Depth mm	265				285				265		285	
	Net weight kg	29.0		35.0		37.0		28.0		34.0		36.0	

### Measurements conform to JISC 9612 standards

	Indoor air temperature	Outdoor air temperature
Cooling	27°C D.B. / 19°C W.B.	35°C D.B. / 24°C W.B.
Heating	20°C D.B. / -	7°C D.B. / 6°C W.B.

### Operation range for low ambient model

	Indoor air intake temp.	Outdoor air intake temp.
Cooling	Maximum	32°C D.B. / 23°C W.B.
	Minimum	19°C D.B. / 14°C W.B.
		-15°C D.B.

### Operation range for standard model

	Indoor air intake temp.	Outdoor air intake temp.
Cooling	Maximum	32°C D.B. / 23°C W.B.
	Minimum	19°C D.B. / 14°C W.B.
Heating	Maximum	27°C D.B.
	Minimum	16°C D.B. / -9°C W.B.

Because its products are subject to continuous improvements, SANYO reserves the right to modify product design and specifications without notice and without incurring any obligations.



Distributed by:



SANYO Electric Co., Ltd.

Japan

©2005 SANYO Printed in Japan